

AVE-POE4S

100 Mbps PoE Switch



AMERICAN VIDEO EQUIPMENT

KEY FEATURES


- Ports 1 to 4 support IEEE 802.3af standard.
- When the switch is in **EXTEND** mode and the data rate is 10 Mbps, ports 1 to 4 support long-distance data transmission up to 250 meters.
- All ports support 6 kV lightning protection.
- This switch supports Auto MDI/MDIX.
- This switch supports store-and-forward.
- This switch supports MAC address auto learning and auto aging.
- This switch supports smart cache optimization.
- This switch supports desktop / wall mounting.



OVERVIEW

AVE-POE4S PoE switch provides five 100 Mbps Ethernet ports, and ports 1 to 4 of the switch can identify and supply power to PoE powered devices compliant with IEEE 802.3af standard automatically via Ethernet cables. The maximum output PoE power of a single port is 15.4 W and the entire switch is 35 W. Additionally, the switch is also equipped with plug and play function, making it the perfect choice for hotels, schools, factory dormitories and SMEs to have cost-effective PoE network.

DIMENSIONS

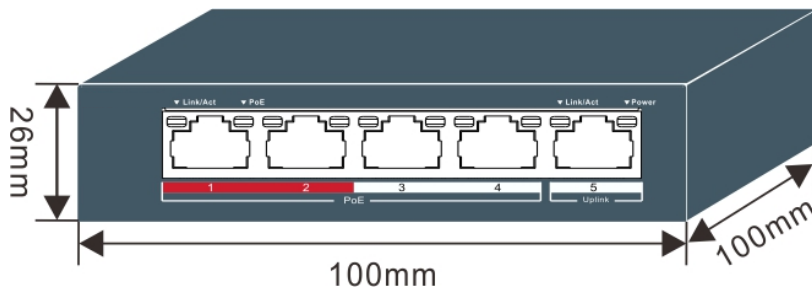

AMERICAN VIDEO EQUIPMENT

AVE (Europe) 13B Blanchardstown Corporate Park 1, Blanchardstown, Dublin 15, Rep. of Ireland
 Tel: +353 (1) 864 7450 Fax: +353 (1) 864 7451 Email: eusales@ave-global.com Web: www.ave-global.com

AVE (UK) Endeavour House, Coopers End Road, Stansted, Essex, CM24 1SJ
 Tel: +44 (0)845 600 9323 Fax: +44 (0)845 600 9363 Email: eusales@ave-global.com Web: www.ave-global.com

AVE (USA) 2300 Central Parkway, Suite C, Houston, Texas TX 77092
 Tel: +1 (281) 443 2300 Fax: +1 (281)-443-8915 Email: usasales@ave-global.com Web: www.ave-global.com

AVE (Asia) 147 Soi OnNut44, (Sampheengong Villa), Sukhumvit 77Rd., Suanluang, Suanluang, Bangkok 10250 Thailand.
 Tel: +662-331-9285 Fax: +662 331 9365 Email: ave@avethailand.com Web: www.avethailand.com

AVE-POE4S

100 Mbps PoE Switch



AMERICAN VIDEO EQUIPMENT

SPECIFICATIONS

MODEL	AVE-POE4S
Port	
Port amount	5
Port type	RJ45, 10/100 Base-T(X)
Standard	IEEE 802.3, IEEE 802.3u, IEEE 802.3x
Forwarding method	Store-and-forward
Flow control	Back-pressure flow control in IEEE 802.3x full duplex
Priority queue	2
MAC address table	1 K
QoS	Supported on ports 1 and 2.
Switching capacity	1 Gbps
Packet forwarding rate	0.744 Mpps
Physical appearance/structure	
Appearance	0.6 mm sheet of galvanized metal without electric fan
Weight	0.141 kg
Dimension	100 mm × 100 mm × 26 mm
Mounting type	Desktop / wall mounting
Environment	
Operating temperature	(0 - 40) °C
Storage temperature	(-40 - 70) °C
Operating humidity	(10 - 90) % RH, non-condensing
Storage humidity	(5 - 90) % RH, non-condensing
Power supply	
Power input	48 V DC, 0.8 A
Reverse connection protection	Supported
Power consumption	< 38 W
Other parameters	
LED indicator	Link/Act LED indicators, PoE LED indicator, Power LED indicator



AMERICAN VIDEO EQUIPMENT

AVE (Europe) 13B Blanchardstown Corporate Park 1, Blanchardstown, Dublin 15, Rep. of Ireland
 Tel: +353 (1) 864 7450 Fax: +353 (1) 864 7451 Email: eusales@ave-global.com Web: www.ave-global.com

AVE (UK) Endeavour House, Coopers End Road, Stansted, Essex, CM24 1SJ
 Tel: +44 (0)845 600 9323 Fax: +44 (0)845 600 9363 Email: eusales@ave-global.com Web: www.ave-global.com

AVE (USA) 2300 Central Parkway, Suite C, Houston, Texas TX 77092
 Tel: +1 (281) 443 2300 Fax: +1 (281)-443-8915 Email: usasales@ave-global.com Web: www.ave-global.com

AVE (Asia) 147 Soi OnNut44, (Sampheengong Villa), Sukhumvit 77Rd., Suanluang, Suanluang, Bangkok 10250 Thailand.
 Tel: +662-331-9285 Fax: +662 331 9365 Email: ave@avethailand.com Web: www.avethailand.com