

AVE-TVIVFIRB10-Z5

5MP MOTORIZED VARI-FOCAL BULLET CAMERA




Key Features


- 5 MP high performance CMOS
- 2560 × 1944 resolution
- 2.7 mm to 13.5 mm motorized vari-focal lens
- EXIR 2.0, smart IR, up to 40 m IR distance
- OSD menu, 2D DNR, DWDR
- 4 in 1 video output (switchable TVI/AHD/CVI/CVBS)
- IP67
- Up the coax (UTC-C)




Dimensions

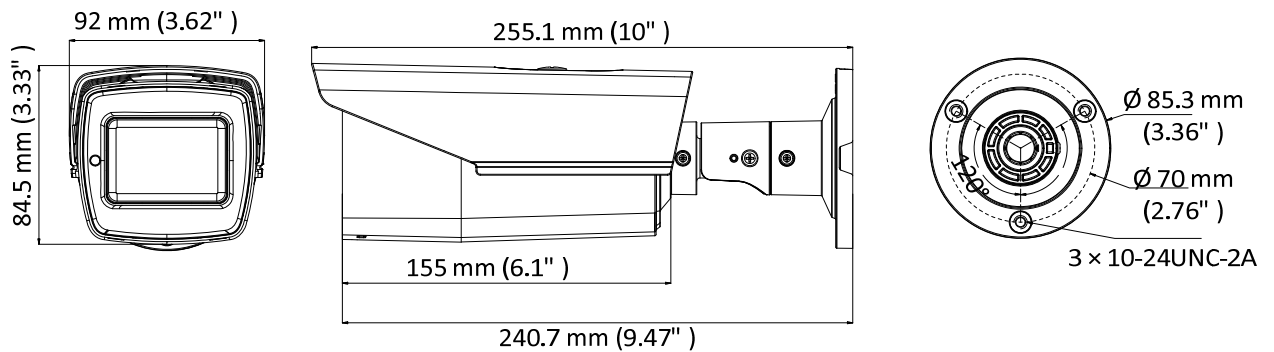


Accessories

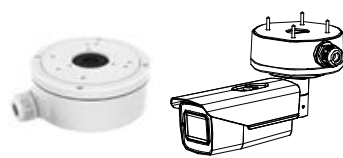

Junction Box

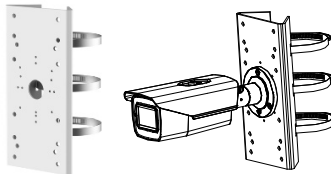

Vertical Pole Mount

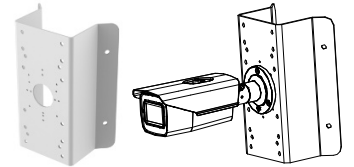

Corner Mount



AVE (Europe) 13B Blanchardstown Corporate Park 1, Blanchardstown, Dublin 15, Rep. of Ireland
 Tel: +353 (1) 864 7450 Fax: +353 (1) 864 7451 Email: eusales@ave-global.com Web: www.ave-global.com
AVE (UK) Endeavour House, Coopers End Road, Stansted, Essex, CM24 1SJ
 Tel: +44 (0)845 600 9323 Fax: +44 (0)845 600 9363 Email: eusales@ave-global.com Web: www.ave-global.com
AVE (USA) 2300 Central Parkway, Suite C, Houston, Texas TX 77092
 Tel: +1 (281) 443 2300 Fax: +1 (281)-443-8915 Email: usasales@ave-global.com Web: www.ave-global.com
AVE (Asia) 147 Soi OnNut44, (Sampheonong Villa), Sukhumvit 77Rd., Suanluang, Suanluang, Bangkok 10250 Thailand.
 Tel: +662-331-9285 Fax: +662 331 9365 Email: ave@avethailand.com Web: www.avethailand.com

AVE-TVIVFIRB10-Z5

5MP MOTORIZED VARI-FOCAL BULLET CAMERA



Specifications

AVE-TVIVFIRB10-Z5	
Camera	
Image Sensor	5 MP CMOS image sensor
Effective Pixels	2560 (H) × 1944 (V)
Min. illumination	Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50,000 s NTSC: 1/30 s to 1/50,000 s
Lens	2.7 mm to 13.5 mm motorized vari-focal lens
Horizontal Field of View	95.7° to 29.1°
Lens Mount	Ø 14
Day & Night	IR cut filter
Angle Adjustment	Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360°
Synchronization	Internal synchronization
Frame Rate	PAL: 5 MP@20fps, 4 MP@25fps, 1080p@25fps NTSC: 5 MP@20fps, 4 MP@30fps, 1080p@30fps
Menu	
AGC	Support
D/N Mode	Auto/Color/BW (Black and White)
White Balance	ATW/MWB
BLC	Support
DWDR (Digital Wide Dynamic Range)	Support
Functions	Brightness, Sharpness, DNR, Mirror, Smart IR
Interface	
Video Output	1 HD analog output
Switch Button	TVI/AHD/CVI/CVBS
General	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation)
Power Supply	12 VDC ±15%, 24 VAC ±15%
Power Consumption	Max. 8.9 W
Protection Level	IP67
Material	Front cover: Metal Main body: Plastic
IR Range	Up to 40 m
Communication	Up the coax, Protocol: UTC-C (TVI output)
Dimensions	84.5 mm × 92 mm × 255.1 mm (3.33" × 3.62" × 10")
Weight	Approx. 705 g (1.55 lb.)



AVE (Europe) 13B Blanchardstown Corporate Park 1, Blanchardstown, Dublin 15, Rep. of Ireland
Tel: +353 (1) 864 7450 Fax: +353 (1) 864 7451 Email: eusales@ave-global.com Web: www.ave-global.com

AVE (UK) Endeavour House, Coopers End Road, Stansted, Essex, CM24 1SJ
Tel: +44 (0)845 600 9323 Fax: +44 (0)845 600 9363 Email: eusales@ave-global.com Web: www.ave-global.com

AVE (USA) 2300 Central Parkway, Suite C, Houston, Texas TX 77092
Tel: +1 (281) 443 2300 Fax: +1 (281)-443-8915 Email: usasales@ave-global.com Web: www.ave-global.com

AVE (Asia) 147 Soi OnNut44, (Samphoenong Villa), Sukhumvit 77Rd., Suanluang, Suanluang, Bangkok 10250 Thailand.
Tel: +662-331-9285 Fax: +662 331 9365 Email: ave@avethailand.com Web: www.avethailand.com